
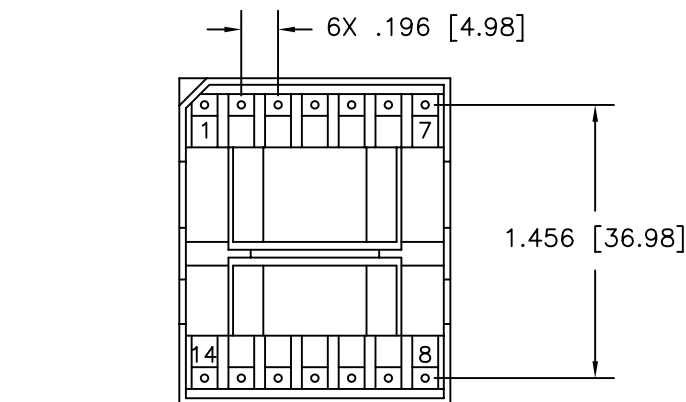
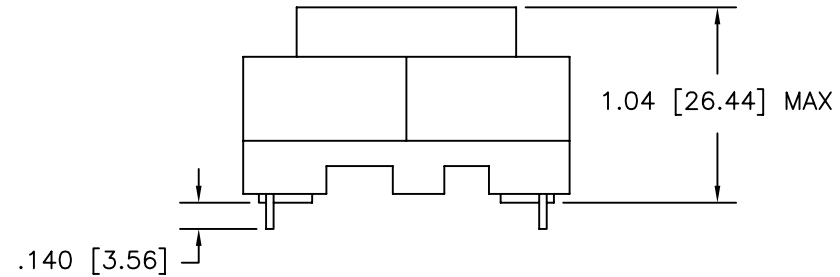
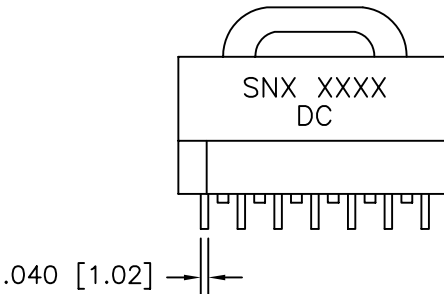
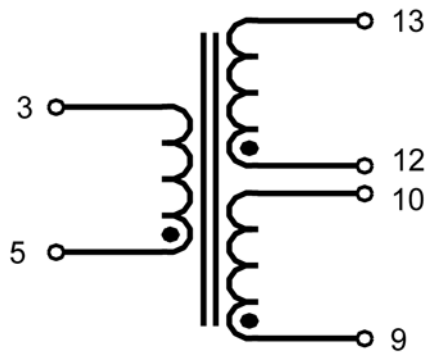


2

1

Test Parameter	Target
Primary Inductance	550 uH±5%
Primary Leakage Inductance	110 uH±5%
DCR (primary)	
DCR (secondary)	
Dielectric Strength (pri-sec)	5000 Vac, 60s
Note: For all inductance measurements, f=100 KHz@1.0 V	

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	X1	INITIAL RELEASE	03/06/08	SC
	X2	ADDED PROPRIETARY STATEMENT	06/23/08	SC

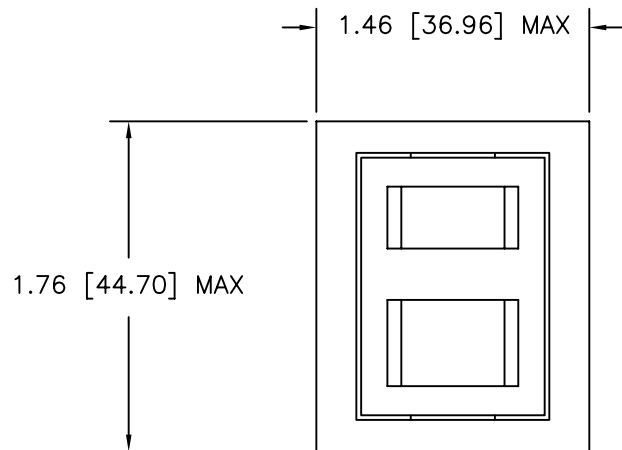

**PRELIMINARY**

**SANTRONICS RESTRICTED**

THIS DOCUMENT CONTAINS RESTRICTED INFORMATION THAT IS SANTRONICS CONFIDENTIAL AND PROPRIETARY. DISCLOSURE OR DUPLICATION IS NOT PERMITTED WITHOUT AUTHORIZATION FROM SANTRONICS.

NEXT ASSEMBLY	USED ON
APPLICATION	
WORKMANSHIP PER MIL-HDBK-454 GUIDELINE 9	

UNLESS OTHERWISE SPECIFIED		DATE
DIMENSIONS ARE IN INCHES		DRAWN TK 03/06/08
TOLERANCES		CHECKED
FRACTIONS ±1/64	DECIMALS .XX ± .02 .XXX ± .010	APPROVED SC 03/06/08
ANGLES 1°		APPROVED
ALL SURFACES ✓ EXCEPT AS NOTED		APPROVED
PROJECTION		CONTRACT NUMBER
NOTE: DEBURR AND BREAK ALL SHARP EDGES EXCEPT AS NOTED.		
DO NOT SCALE THIS DRAWING		

<b>SANTRONICS</b> SUNNYVALE, CA			
TRANSFORMER ASSEMBLY, 200W, 24V			
SIZE	FSCM NO	DWG NO	REV
<b>B</b>		SNX 2446	X2
SCALE 1/1		SHEET 1 OF 1	

2

1