
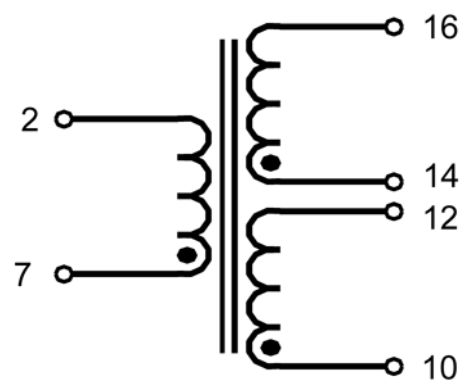
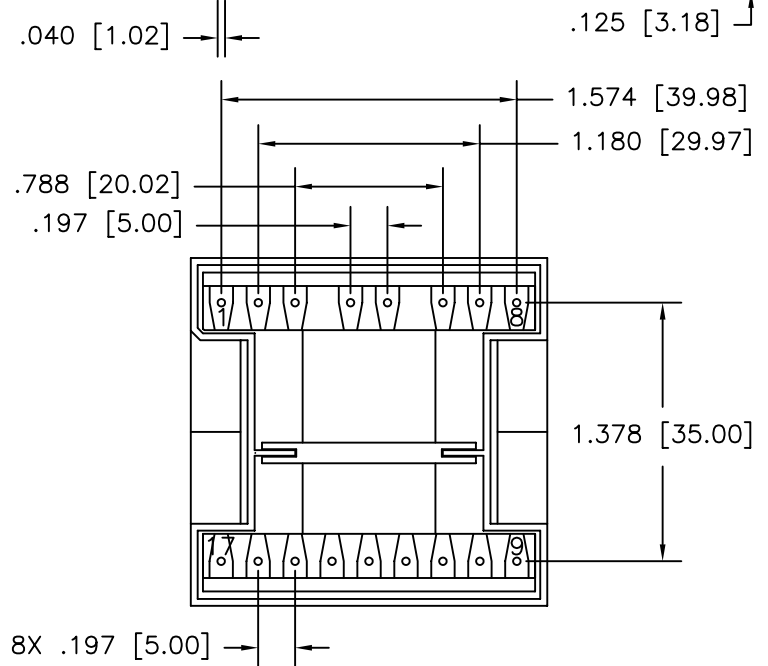
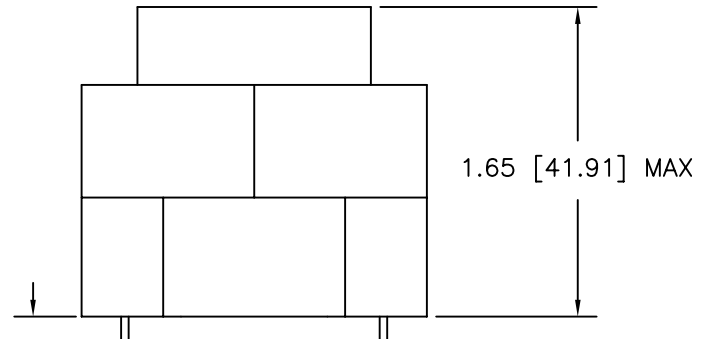
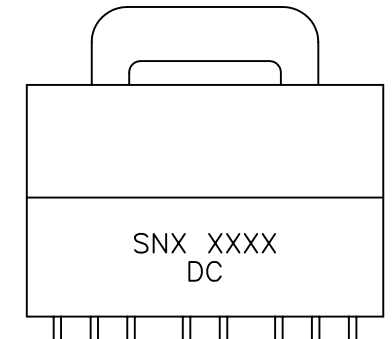


2

1

Test Parameter	Target
Primary Inductance	400 uH±5%
Primary Leakage Inductance	80 uH±5%
DCR (primary)	
DCR (secondary)	
Dielectric Strength (pri-sec)	5000 Vac, 60s
Note: For all inductance measurements, f=100 KHz@1.0 V	

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	X1	INITIAL RELEASE	03/06/08	SC
	X2	ADDED PROPRIETARY STATEMENT	06/23/08	SC

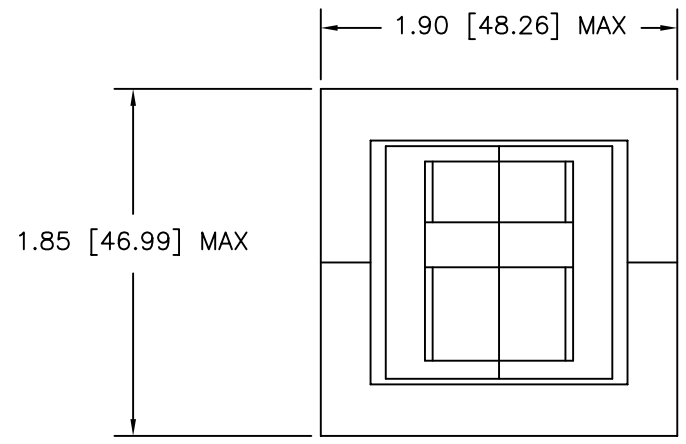

PRELIMINARY

SANTRONICS RESTRICTED

THIS DOCUMENT CONTAINS RESTRICTED INFORMATION THAT IS SANTRONICS CONFIDENTIAL AND PROPRIETARY. DISCLOSURE OR DUPLICATION IS NOT PERMITTED WITHOUT AUTHORIZATION FROM SANTRONICS.

NEXT ASSEMBLY	USED ON
APPLICATION	
WORKMANSHIP PER MIL-HDBK-454 GUIDELINE 9	

UNLESS OTHERWISE SPECIFIED		DATE	
DIMENSIONS ARE IN INCHES		DRAWN	TK
TOLERANCES		CHECKED	
FRACTIONS	DECIMALS	APPROVED	SC
±1/64	.XX ± .02 .XXX ± .010	APPROVED	
ALL SURFACES ✓ EXCEPT AS NOTED		APPROVED	
PROJECTION		APPROVED	
NOTE: DEBURR AND BREAK ALL SHARP EDGES EXCEPT AS NOTED.		CONTRACT NUMBER	
DO NOT SCALE THIS DRAWING			

SANTRONICS SUNNYVALE, CA			
SIZE	FSCM NO	DWG NO	REV
B		SNX 2450	X2
SCALE	1/1	SHEET	1 OF 1

2

1