
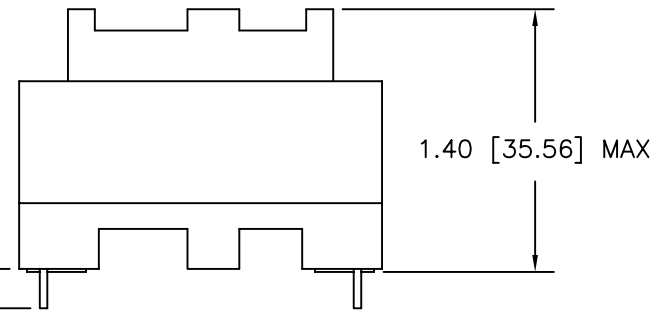
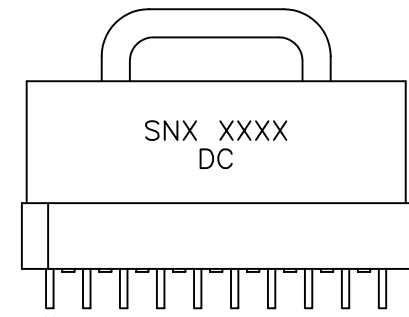
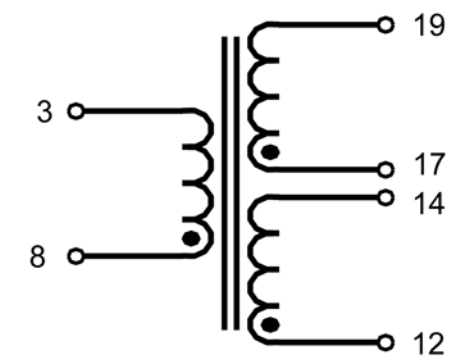


2

1

Test Parameter	Target
Primary Inductance	275 uH±5%
Primary Leakage Inductance	55 uH±5%
DCR (primary)	
DCR (secondary)	
Dielectric Strength (pri-sec)	5000 Vac, 60s
Note: For all inductance measurements, f=100 KHz@1.0 V	


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	X1	INITIAL RELEASE	03/06/08	SC
	X2	ADDED PROPRIETARY STATEMENT	06/23/08	SC

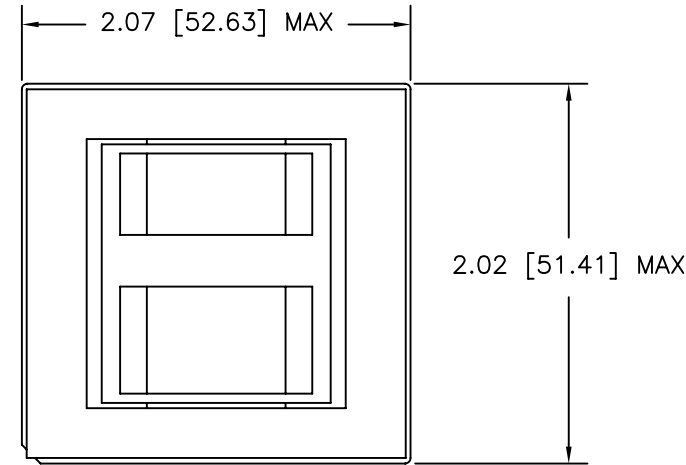

.040 [1.02]

.210 [5.33]

9X .197 [5.00]

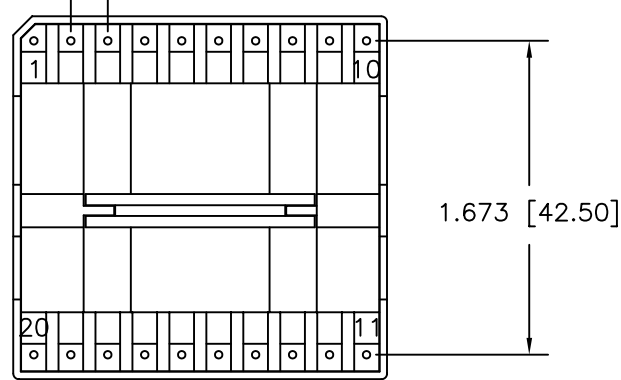

PRELIMINARY

SANTRONICS RESTRICTED

THIS DOCUMENT CONTAINS RESTRICTED INFORMATION THAT IS SANTRONICS CONFIDENTIAL AND PROPRIETARY. DISCLOSURE OR DUPLICATION IS NOT PERMITTED WITHOUT AUTHORIZATION FROM SANTRONICS.

UNLESS OTHERWISE SPECIFIED		DATE		SANTRONICS SUNNYVALE, CA	
DIMENSIONS ARE IN INCHES		DRAWN TK 03/06/08			
TOLERANCES		CHECKED		TRANSFORMER ASSEMBLY, 400W, 24V	
FRACTIONS ±1/64	DECIMALS .XX ±.02 .XXX ±.010	APPROVED SC 03/06/08			
ALL SURFACES ✓ EXCEPT AS NOTED		APPROVED		SIZE B	FSCM NO
NEXT ASSEMBLY	USED ON	PROJECTION		DWG NO SNX 2454	
APPLICATION		NOTE: DEBURR AND BREAK ALL SHARP EDGES EXCEPT AS NOTED.		REV X2	
WORKMANSHIP PER MIL-HDBK-454 GUIDELINE 9		DO NOT SCALE THIS DRAWING		SCALE 1/1	SHEET 1 OF 1

2

1

B

B

A

A