
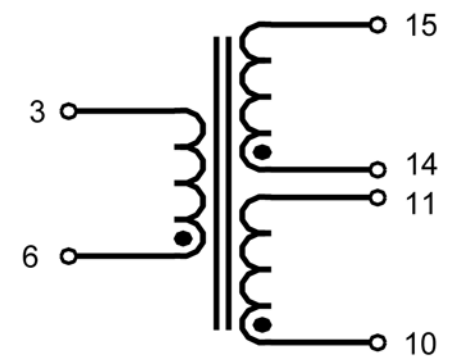
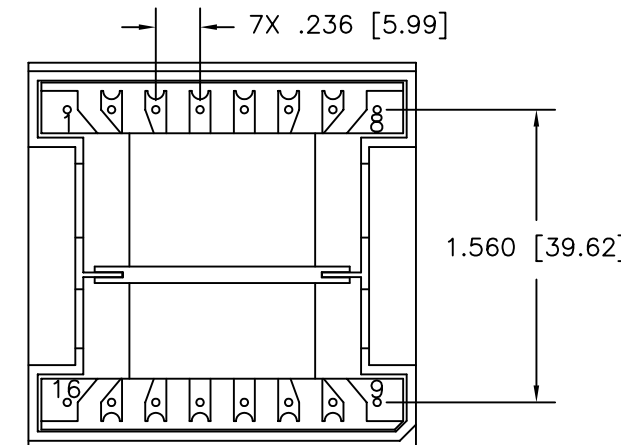
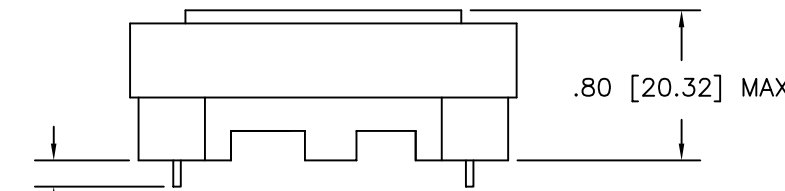
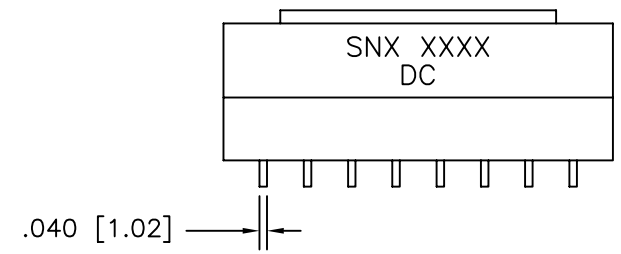


2

1

Test Parameter	Target
Primary Inductance	550 uH±5%
Primary Leakage Inductance	110 uH±5%
DCR (primary)	
DCR (secondary)	
Dielectric Strength (pri-sec)	5000 Vac, 60s
Note: For all inductance measurements, f=100 KHz@1.0 V	

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	X1	INITIAL RELEASE	03/06/08	SC
	X2	ADDED PROPRIETARY STATEMENT	06/23/08	SC

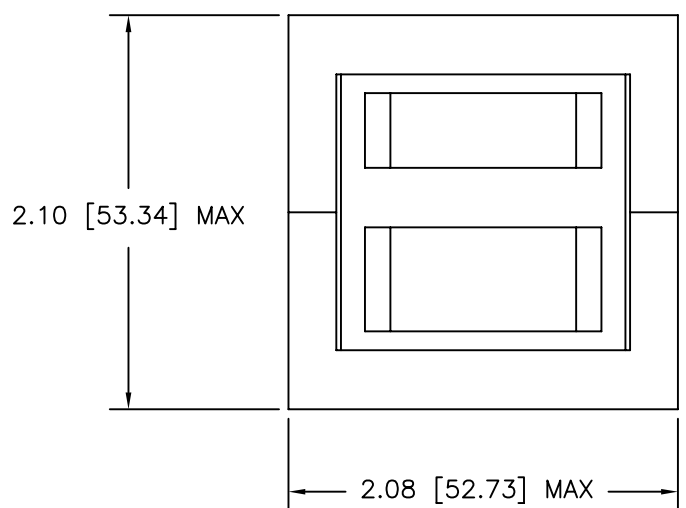

PRELIMINARY

SANTRONICS RESTRICTED
 THIS DOCUMENT CONTAINS RESTRICTED INFORMATION THAT IS SANTRONICS CONFIDENTIAL AND PROPRIETARY. DISCLOSURE OR DUPLICATION IS NOT PERMITTED WITHOUT AUTHORIZATION FROM SANTRONICS.

UNLESS OTHERWISE SPECIFIED		DRAWN TK		DATE 03/06/08		SANTRONICS SUNNYVALE, CA TRANSFORMER ASSEMBLY (LOW PROFILE), 200W, 24V				
DIMENSIONS ARE IN INCHES		CHECKED		APPROVED SC						DATE 03/06/08
TOLERANCES		APPROVED		APPROVED		APPROVED		CONTRACT NUMBER		
FRACTIONS ±1/64	DECIMALS .XX ± .02 .XXX ± .010	ANGLES 1°	ALL SURFACES ✓ EXCEPT AS NOTED		PROJECTION		NOTE: DEBURR AND BREAK ALL SHARP EDGES EXCEPT AS NOTED.		DO NOT SCALE THIS DRAWING	
NEXT ASSEMBLY	USED ON	APPLICATION		WORKMANSHIP PER MIL-HDBK-454 GUIDELINE 9		SCALE 1/1		SHEET 1 OF 1		
SIZE B		FSCM NO		DWG NO SNX 2458		REV X2				

2

1